


PRODUCT USE INSTRUCTIONS

Step 1: (see diagrams below) Attach only on a wand that is clean and free of grease and dirt.

For 3/4" (19mm) wand attach one layer of Velcro® - remove film from back of one 2"x 5" Velcro® loop piece and place adhesive side around pressure washer wand starting 2"(50mm) above the spray nozzle / quick connect. For best results attach at room temperature and allow 1 hour for adhesive to cure for most secure bond.

For 1/2"(12.5mm) wand attach double layer of Velcro® - remove film from back of one 2"x 5" Velcro® piece and place adhesive side around pressure washer wand starting 2"(50mm) above the spray nozzle / quick connect. Remove the film from back of the second (2"x 5") Velcro® piece and attach the adhesive side to the first piece of Velcro® previously attached. This will create a double layer around the wand that is bonded together (see diagram below). For best results attach at room temperature and allow 1 hour for adhesive to cure for most secure bond.

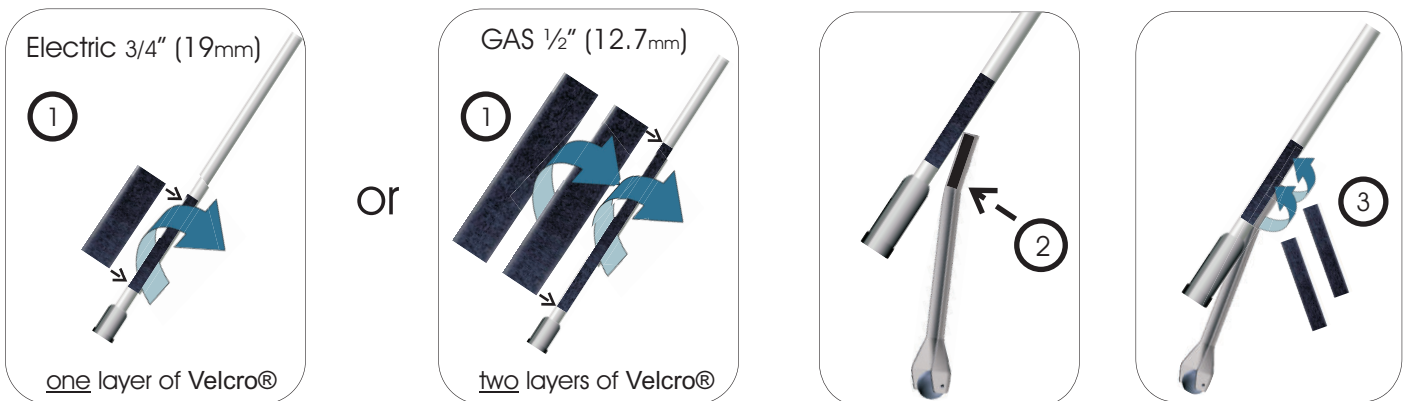

Step 2: Attach Sprayglide™ to the underside of the wand (gun trigger side). For first time mounting, the recommended position is close to the spray nozzle (end of the wand closest to surface when in use). When Sprayglide™ is attached, test distance of spray to surface for your pressure washer and desired results. Remove and re-attach as necessary, the further up the wand Sprayglide™ is - the closer the spray will be to the surface. See note and diagrams below.

Step 3: Attach 1"x 6" hook and loop straps around both the wand and Sprayglide™.

We recommended you start this wrapping procedure by attaching the strap to the loop material adhered to the wand in step 1. This will provide stronger grip when you pull to secure tightly around the wand and Sprayglide™ together.

Note: Sprayglide attachment method allows for location adjustment along the spray wand based on to 3 criteria: 1) the operators physical height; 2) the pressure washers power (PSI, GPM & nozzle selection); and 3) spray wand length. In addition, the spray distance from surface can also be finely adjusted while in operation: Tilt (pivot) the wand upward when closer distance is required; tilt (pivot) the wand downward when further distance is required.

Invert the wand 180 degrees with Sprayglide attached when controlled extremely close proximity of the spray is required.



See instructional videos at www.sprayglide.com